


<p>MT1270HR 12 volts 8Ah</p>	<p>MT1270HR having its design life of 8 years @ 20 degree Celsius for floating application and around 1500 cycles for 30% depth of discharge for cyclic application.</p>
	<p>As our product were all rechargeable , highly efficient, maintenance free &amp; leakage proof usable in all positions and it meets the standards of JISC, BS, DIN, IEC etc.</p>
	<p>We're ISO9001certified &amp;UL approved as well as CE</p>
	<p>Our containers were all ABS resin and grades were : UL94-HB, UL94V-0 &amp; UL94V-2 (flame retardant types could be arranged).</p>


Specification

Nominal voltage	12 volts
Capacity	7.8 ampere hours @20 °C, 20 hours rated (cut off voltage 1.75V/cell)
Dimension	L: 151 mm W: 65 mm H: 94 mm TH: 100 mm
Weight approx.	2.3 kg or 5.07 pounds
Internal resistance	Approx. 22 m Ω
Self-discharge rate	Approx. 3% per month @ 25 degree Celsius
Operation temperature range	Discharged: -15 to 60 degree Celsius
	Charging: 5 to 65 degree Celsius
	Storage: 0 degree to 60 degree Celsius
Floating charge voltage	13.60 to 13.80 volts (-15mv / degree Celsius )
Cyclic charging voltage	14.50 to 14.90 volts (-20mv / degree Celsius)
Maximum charging currant	2.4 ampere (A)
Boost/equalizing charge	Not required
Terminal type	Copper
Container material	General ABS resin

Charging Characteristics(25°C)

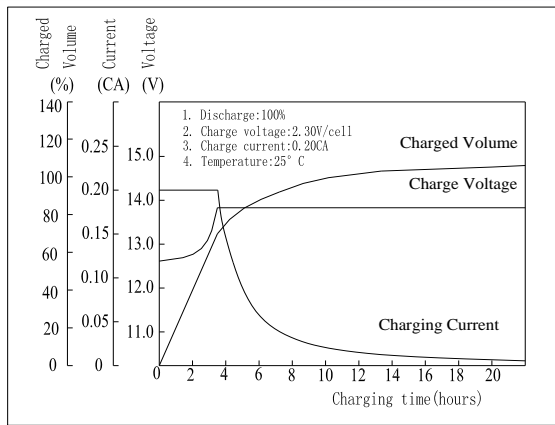

Open Circuit Voltage vs Residual Capacity (25°C)

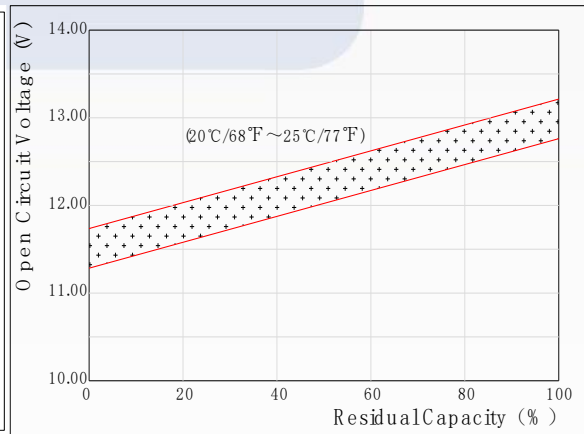

Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	3h	5h	10h	20h
9.60V	31.0	20.2	15.0	8.80	5.18	2.00	1.28	0.72	0.40
10.20V	29.5	19.2	14.4	8.45	4.97	1.98	1.26	0.72	0.40
10.80V	27.7	18.0	13.7	8.03	4.72	1.94	1.23	0.72	0.40

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	3h	5h	10h	20h
9.60V	346	228	171	100	59.9	23.8	15.2	8.72	4.82
10.20V	329	216	164	96.9	57.5	23.4	15.0	8.63	4.77
10.80V	309	204	156	91.9	54.6	22.9	14.7	8.63	4.74